



TECHNICAL BULLETIN

Last Revision: June 2017

Subject: Valley – Woven Valley


Atlas Roofing Corporation approves of the Woven Valley installation method of its shingles.

Shingles on the intersecting roof surfaces may be applied toward the valley from both roof areas simultaneously or each area may be worked separately up to a point about 3" from the center of the valley and the gap closed later. Make sure the valley flashing is in place prior to shingle installation.

Regardless of which procedure is followed:

1. Apply the first course along the eave of one roof area up to and over the valley with the last shingle extending at least 12" onto the intersecting roof.
2. Then apply the first course onto the intersecting roof along the eave and extend it across the valley over the top of the shingle already crossing the valley and at least 12" onto the other roof surface.
3. Apply successive courses alternately from the adjoining roof areas, weaving the valley shingles over each other.
4. Press each shingle tightly into the valley and follow the same nailing procedures as the closed cut valley.

Atlas Limited Shingle Warranty will be honored as long as shingles are installed in accordance to the written installation instructions as written on the shingle wrapper. Local building codes must be followed.

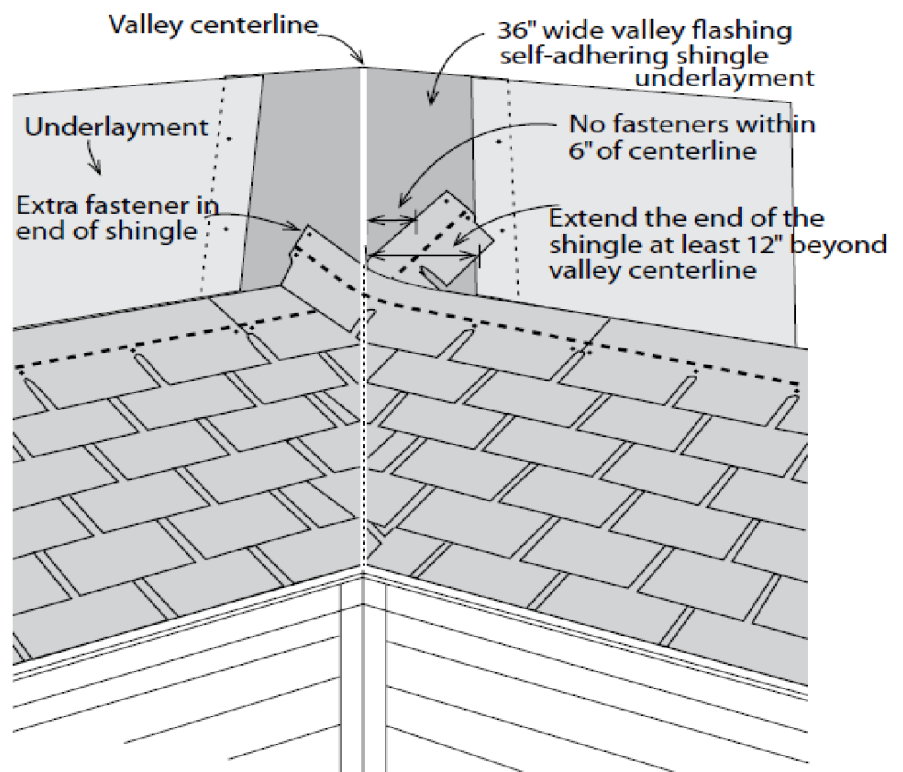

For additional warranty information please our warranty page at atlasroofing.com/warranty