

Roofing Products Reference Guide

SHINGLES/UNDERLAYMENT/ACCESSORIES

Signature Select®
Roofing System



SOUTHEAST REGION

Product Features at a Glance

Roof Shingles

[illegible]

Roof Shingle Accessories

	StormMaster® Hip & Ridge Shingles	Pro-Cut® High Profile Hip & Ridge Shingles	Pro-Cut™ Hip & Ridge Shingles	ProLam™ Hip & Ridge Shingles	Pro-Cut® Starter Shingles
Colors	Colors to match StormMaster® Shake shingles	Colors to match Atlas shingles	Colors to match Atlas shingles	Colors to match ProLam® shingles	N/A
Warranty	Standard Limited Warranty**	Standard Limited Warranty**	Standard Limited Warranty**	Standard Limited Warranty**	N/A
Impact Rating	Class 4 UL 2218 Impact Resistance	—	Class 3 UL 2218 Impact Resistance	—	—
Asphalt Technology	Core4® Polymer Modified Technology	SBS Modified Asphalt	Standard Shingle Asphalt	Standard Shingle Asphalt	Standard Shingle Asphalt
System Warranty	Signature Select® Eligible ¹	Signature Select® Eligible ¹	Signature Select® Eligible ¹	Signature Select® Eligible ¹	Signature Select® Eligible ¹
Algae Protection	3M™ Scotchgard™ Protector ²	3M™ Scotchgard™ Protector ²	3M™ Scotchgard™ Protector ²	Algae Resistant Shingle (ARS)	N/A

Roof Underlayment

[illegible]

Roof Ventilation


[illegible]

Atlas Designer Shingles

For lasting protection against black streaks caused by algae, install shingles featuring the Atlas Lifetime* Algae Resistance Limited Warranty.

StormMaster® Shake

Premium Protection with Exclusive Core4® Technology



10 COLORS

Aspen Grove
Black Shadow
Chestnut
Copper Canyon
Grand Teton
Moonlight Beach 2.0 - SRI 21***
Midnight Lake
Morning Harvest
Pewter
Weathered Wood



Length: 42" / 1067 mm x Width: 14" / 356 mm

Exposure: 6" / 152 mm

Shingles per Bundle: 18-20

FEATURES

- 3M™ Scotchgard™ Protector
- 3M™ Smog-Reducing Technology
- 3M™ Cooling Technology (Moonlight Beach)
- Up to 160 mph Wind Limited Warranty**
- FASTAC® Double Sealant Lines
- Manufactured Using Core4® Polymer Modified Technology
- Class 4 Impact Resistance
- Atlas Lifetime* Algae Resistance Limited Warranty
- Lifetime Limited Warranty**
- Atlas Signature Select® Eligible¹

IMPACT RESISTANCE


- UL 2218, Class 4 Impact Resistance
- FM 4473, Class 4 Impact Resistance
- IBHS Hail Test/ASTM WK78591 - Excellent (PRI)

CODES AND COMPLIANCES

- ASTM D7158, Class H Wind Resistance, Passed at 150 mph
- ASTM D6381, Uplift Resistance
- ASTM D3018, Type 1
- ASTM D3161, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- UL 790, Class A Fire Resistance
- UL 2390, Class H Wind Resistance
- Meets AC438 Criteria
- CAN/CSA-A123.5-M90
- Florida Building Code Approved
- Miami-Dade County Product Control Approved

Pinnacle® Pristine

High Performance Meets Lasting Beauty



16 COLORS

Black Shadow
Chestnut
Coastal Granite
Hearthstone Gray
Majestic Shake
Midnight Lake
Morning Harvest
Oyster Shell
Pewter
Rustic Highland
Summer Storm
Sunset
Tan Mist
Weathered Shadow
Weathered Wood
Woodland Green



Length: 42" / 1067 mm x Width: 14" / 356 mm

Exposure: 6" / 152 mm

Shingles per Bundle: 18-20

FEATURES

- 3M™ Scotchgard™ Protector
- Class 3 Impact Resistance
- Up to 160 mph Wind Limited Warranty**
- FASTAC® Double Sealant Lines
- Atlas Lifetime* Algae Resistance Limited Warranty
- Lifetime Limited Warranty**
- Atlas Signature Select® Eligible¹

IMPACT RESISTANCE

- UL 2218, Class 3 Impact Resistance

CODES AND COMPLIANCES

- ASTM D7158, Class H Wind Resistance, Passed at 150 mph
- ASTM D6381, Uplift Resistance
- ASTM D3018, Type 1
- ASTM D3161, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- Meets AC438 Criteria
- CAN/CSA-A123.5-M90
- Florida Building Code Approved
- Miami-Dade County Product Control Approved

Dreaming of a Home Redesign?



Get creative with the Atlas Roof Inspiration Center. In the Roof & Home Design Studio, you can upload photos of your home and swipe to visualize different looks. With the Visual Product Selector, explore Atlas shingle styles, features, and colors to help you visualize and choose the perfect roof for your home.


AtlasRoofing.com/Roof-Inspiration



#AtlasProtects

Pinnacle® Impact

Lasting Beauty that Weathers the Storm



6 COLORS

Black Shadow IR
Hearthstone IR
Morning Harvest IR
Pewter IR
Rustic Highland IR
Weathered Wood IR



LIFETIME
limited warranty



CLASS 4
impact resistance



UP TO 160MPH
wind resistance



Scotchgard™
shingle protector



HP42
technology



3M SMOG
reducing technology



SYSTEM
eligible

Length: 42" / 1067 mm **x Width:** 14" / 356 mm

Exposure: 6" / 152 mm

Shingles per Bundle: 18-20

FEATURES

- 3M™ Scotchgard™ Protector
- 3M™ Smog-Reducing Technology
- Class 4 Impact Resistance
- Up to 160 mph Wind Limited Warranty**
- FASTAC® Double Sealant Lines
- Polymer Modified Technology
- Atlas Lifetime* Algae Resistance Limited Warranty
- Lifetime Limited Warranty**
- Atlas Signature Select® Eligible¹

IMPACT RESISTANCE


- UL 2218, Class 4 Impact Resistance
- FM 4473, Class 4 Impact Resistance
- IBHS Hail Test/ASTM WK78591 - Excellent (PRI)

CODES AND COMPLIANCES

- ASTM D7158, Class H Wind Resistance, Passed at 150 mph
- ASTM D6381, Uplift Resistance
- ASTM D3018, Type 1
- ASTM D3161, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- UL 790, Class A Fire Resistance
- UL 2390, Class H Wind Resistance
- Meets AC438 Criteria
- CAN/CSA-A123.5-M90
- Florida Building Code Approved
- Miami-Dade County Product Control Approved (ELIGIBLE)

Pinnacle® Sun

Cool Roof Technology that Fights Smog



7 COLORS

Cool Coastal Cliffs 2.0 - SRI 19***
Cool Coral Canyon 2.0 - SRI 19***
Cool Driftwood 2.0 - SRI 20***
Cool Moonlight Beach 2.0 - SRI 21***
Cool Oyster 2.0 - SRI 25***
Cool Sand 2.0 - SRI 21***
Cool Surf 2.0 - SRI 20***



LIFETIME
limited warranty



3M COOLING
technology



CLASS 3
impact resistance



UP TO 160MPH
wind resistance



Scotchgard™
shingle protector



HP42
technology



3M SMOG
reducing technology



SYSTEM
eligible

Length: 42" / 1067 mm **x Width:** 14" / 356 mm

Exposure: 6" / 152 mm

Shingles per Bundle: 18-20

FEATURES

- 3M™ Scotchgard™ Protector
- 3M™ Cooling Technology
- 3M™ Smog-Reducing Technology
- Class 3 Impact Resistance
- Up to 160 mph Wind Limited Warranty**
- FASTAC® Double Sealant Lines
- Atlas Lifetime* Algae Resistance Limited Warranty
- Lifetime Limited Warranty**
- Atlas Signature Select® Eligible¹

IMPACT RESISTANCE


- UL 2218, Class 3 Impact Resistance

CODES AND COMPLIANCES

- ASTM D7158, Class H Wind Resistance, Passed at 150 mph
- ASTM D6381, Uplift Resistance
- ASTM D3018, Type 1
- ASTM D3161, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- E1980, Solar Reflectance
- UL 790, Class A Fire Resistance
- UL 2390, Class H Wind Resistance
- Meets AC438 Criteria
- CAN/CSA-A123.5-M90
- Florida Building Code Approved
- Miami-Dade County Product Control Approved (ELIGIBLE)

ProLam®

Exceptional Value in a Designer Look



7 COLORS

Black Shadow
Chestnut
Hearthstone Gray
Morning Harvest
Pewter
Weathered Shadow
Weathered Wood



LIFETIME
limited warranty



CLASS 3
impact resistance



UP TO 130MPH
wind resistance



ARS
algae resistance



HP42
technology



SYSTEM
eligible

Length: 42" / 1067 mm **x Width:** 14" / 356 mm

Exposure: 6" / 152 mm

Shingles per Bundle: 18-20

FEATURES

- Up to 130 mph Wind Limited Warranty**
- Class 3 Impact Resistance Limited Warranty**
- Lifetime Limited Warranty**
- Algae Resistant Shingle Lifetime Limited Warranty**
- 3M™ Ceramic-Coated Granules
- Atlas Signature Select® Eligible¹

IMPACT RESISTANCE

- UL 2218, Class 3 Impact Resistance


CODES AND COMPLIANCE

- ASTM D7158, Class H Wind Resistance, Passed at 150 mph
- ASTM D6381, Uplift Resistance
- ASTM D3018, Type 1
- ASTM D3161, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- UL 790, Class A Fire Resistance
- UL 2390, Class H Wind Resistance
- Meets AC438 Criteria
- CAN/CSA-A123.5-M90
- Florida Building Code Approved
- Miami-Dade County Product Control Approved (ELIGIBLE)

Hip & Ridge Shingles

StormMaster®

Featuring Core4® Polymer Modified Technology



Dimensions: 12" x 12"
Exposure: 5-5/8"
Coverage: 31 Linear Feet
Shingles per Package: 66

COLORS

To match Atlas shingles



LIFETIME
limited warranty



CORE4
polymer modified technology



CLASS 4
impact resistance



UP TO 130MPH
wind resistance



Scotchgard
shingle protector



SYSTEM
eligible

FEATURES

- Core4® Polymer Modified Technology
- Class 4 Impact Resistance
- 3M™ Scotchgard™ Protector
- Up to 160 mph Wind Limited Warranty**
- Atlas Lifetime* Algae Resistance Limited Warranty
- Atlas Signature Select® Eligible¹
- Required for use with StormMaster® Shake shingles

IMPACT RESISTANCE

- UL 2218, Class 4 Impact Rating


CODES AND COMPLIANCES

- ASTM D3018, Type 1
- ASTM D3161, Type 1, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- UL 790, Class A Fire Resistance
- Meets AC438 Criteria CAN/CSA-A123.5-M90
- Florida Building Code Approved
- Miami-Dade County Product Control Approved

CLASS 3/4 IMPACT RESISTANCE

Pro-Cut®

Hip & Ridge Shingles



Dimensions: 12" x 12"
Exposure: 5-5/8"
Coverage: 31 Linear Feet
Shingles per Package: 66

COLORS

To match StormMaster® Shake shingles



LIFETIME
limited warranty



Scotchgard
shingle protector



CLASS 3
impact resistance



UP TO 130MPH
wind resistance



SYSTEM
eligible

FEATURES

- 3M™ Scotchgard™ Protector
- Class 3 Impact Resistance
- 130 mph Wind Limited Warranty**
- Atlas Lifetime* Algae Resistance Limited Warranty
- Lifetime Limited Warranty**
- Atlas Signature Select® Eligible¹

IMPACT RESISTANCE

- UL 2218, Class 3 Impact Resistance


CODES AND COMPLIANCES

- ASTM D3018, Type 1
- ASTM D3161, Type 1, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- UL 790, Class A Fire Resistance
- Meets AC438 Criteria CAN/CSA-A123.5-M90
- Florida Building Code Approved
- Miami-Dade County Product Control Approved

CLASS 3/4 IMPACT RESISTANCE

Pro-Cut®

High Profile Hip & Ridge Shingles



Dimensions: 10" x 11.5"
Exposure: 8-1/4"
Coverage: 20 Linear Feet
Shingles per Package: 30

COLORS

To match Atlas shingles



LIFETIME
limited warranty



Scotchgard
shingle protector



CLASS 3
impact resistance



UP TO 130MPH
wind resistance



SYSTEM
eligible

FEATURES

- 3M™ Scotchgard™ Protector
- Class 3 Impact Resistance
- 130 mph Wind Limited Warranty**
- Atlas Lifetime* Algae Resistance Limited Warranty
- Lifetime Limited Warranty**
- Atlas Signature Select® Eligible¹


CODES AND COMPLIANCES

- ASTM D3018, Type 1
- ASTM D3161, Type 1, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- UL 790, Class A Fire Resistance
- Meets AC438 Criteria CAN/CSA-A123.5-M90
- Class A Fire Resistance (UL R21860)
- Wind Resistance (UL 997)
- CAN/CSA-A123.5-M90
- Florida Building Code Approved
- Miami-Dade County Product Control Approved

CLASS 3/4 IMPACT RESISTANCE

ProLam™

Hip & Ridge Shingles



Dimensions: 12" x 12"
Exposure: 5-5/8"
Coverage: 31 Linear Feet
Shingles per Package: 66

COLORS

Black
Hearthstone
Weathered Wood



LIFETIME
limited warranty



ARS
algae resistance



CLASS 3
impact resistance



UP TO 130MPH
wind resistance



SYSTEM
eligible

FEATURES

- Algae Resistance Limited Warranty
- 130 mph Wind Limited Warranty**
- Atlas Signature Select® Eligible¹

IMPACT RESISTANCE

- UL 2218, Class 3 Impact Resistance

CODES AND COMPLIANCES


- ASTM D3018, Type 1
- ASTM D3161, Type 1, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- ASTM E108, Class A Fire Resistance
- UL R21860, Class A Fire Resistance
- UL 997, Wind Resistance
- Meets AC438 Criteria CAN/CSA-A123.5
- Florida Building Code Approved
- Miami-Dade County Product Control Approved

CLASS 3/4 IMPACT RESISTANCE

Starter Shingles

Pro-Cut® HP42®

Starter Shingles



Shingle Dimensions: 8" x 42"
Exposure Limits: Up to 6"
Per Bundle: 140 Linear Feet

CODES AND COMPLIANCES

- ASTM D3018, Type I
- ASTM D3161, Type I, Class F, Tested at 110 mph
- ASTM D3462 As Manufactured
- Code-compliant, meets min. 2" headlap requirement for metric shingles—many competing products do not
- Florida Building Code Approved
- Miami-Dade County Product Control Approved

Pro-Cut® 9XR

9" Universal Starter Shingle Roll

Roll Dimensions: 9" x 33'6"
Exposure Limits: Up to 9"
Per Roll: 33' 4"



CODES AND COMPLIANCES

- ASTM D3018, Type I
- ASTM D3161, Type I, Class F, Tested at 110 mph
- ASTM D3462, As Manufactured
- Florida Building Code Approved
- Miami-Dade County Product Control Approved




A Brand You
Know and Trust
Scotchgard® Protector
25+ years of proven
performance.

Demand Peak Coverage

When you install an Atlas Signature Select® Roofing System¹, all the components are designed for and backed by the industry's best warranty coverage.

Unlike many other roofing warranties that promise more than they deliver, Atlas packs value and assurance into an enhanced premium protection period, which includes non-prorated labor and materials, tear-off and disposal fees, coverage of the full Atlas product system, and transferability.

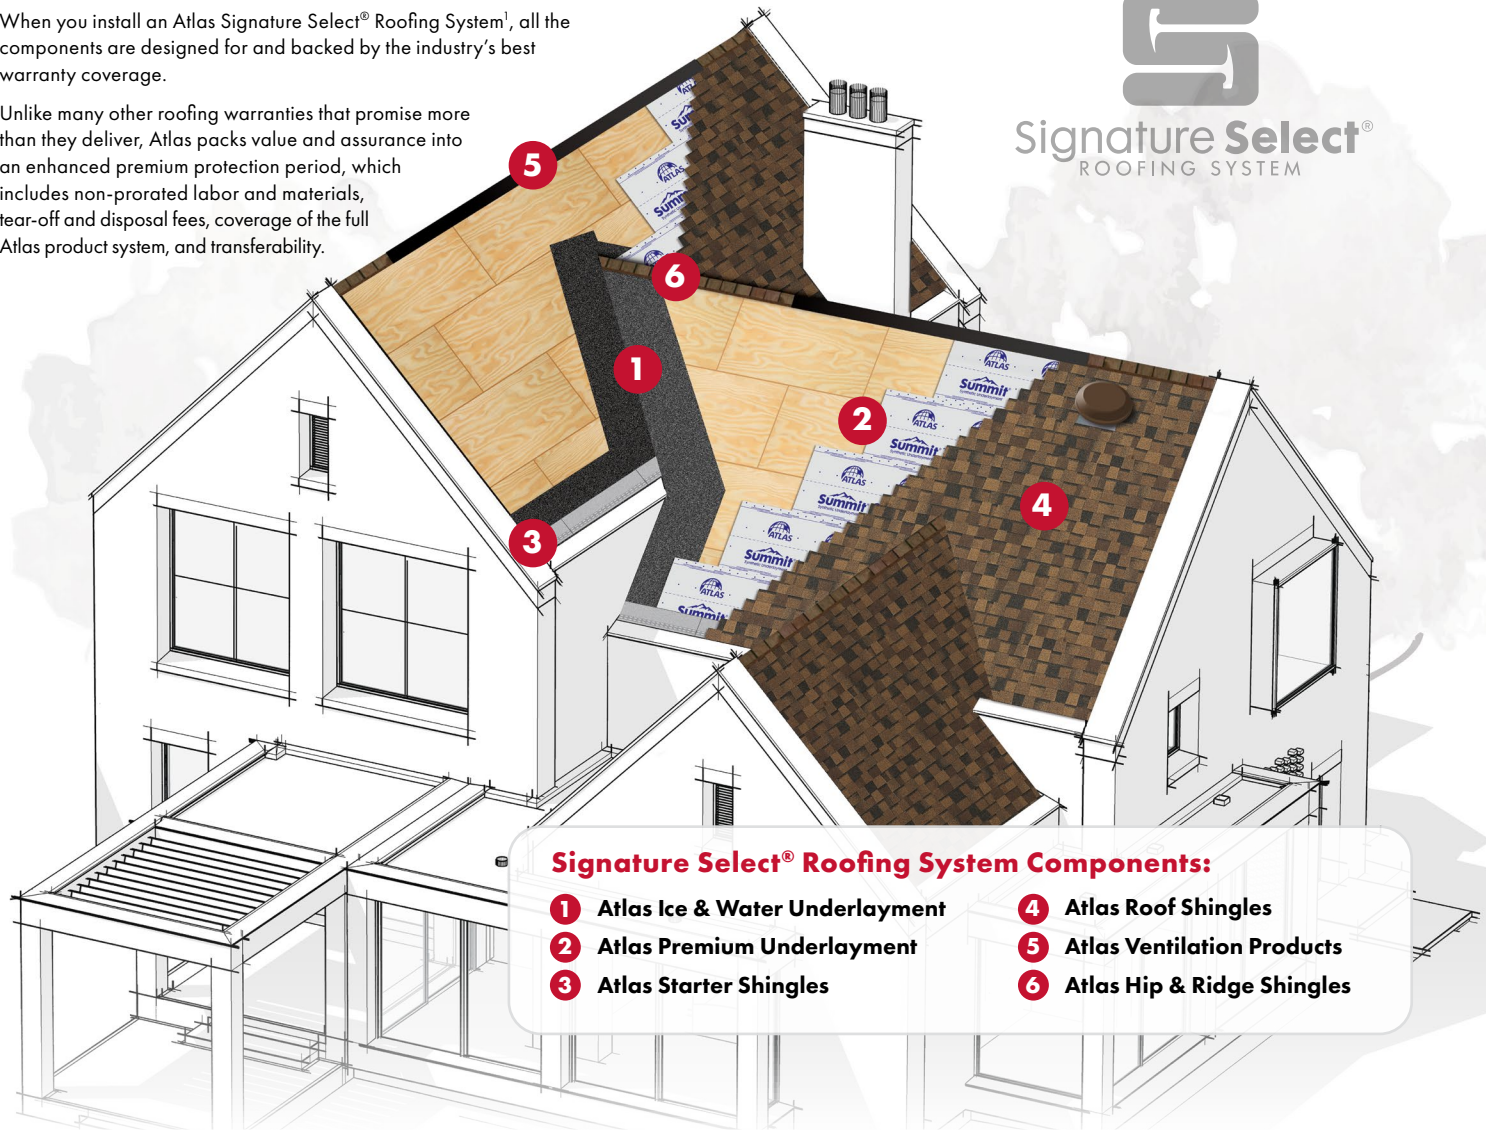

Signature Select® Roofing System Components:

- | | |
|----------------------------------|------------------------------|
| 1 Atlas Ice & Water Underlayment | 4 Atlas Roof Shingles |
| 2 Atlas Premium Underlayment | 5 Atlas Ventilation Products |
| 3 Atlas Starter Shingles | 6 Atlas Hip & Ridge Shingles |

Roof Ventilation

TruRidge® ROOF VENTILATION

TruRidge® Standard Exhaust Vent



Length: 4' / 1219 mm x **Width:** 12" / 305 mm
NFA: 20 sq. in/ft
• Exterior baffle product
• Standard with nails

TruRidge® All-Weather Exhaust Vent



Length: 4' / 1219 mm x **Width:** 12" / 305 mm
NFA: 20 sq. in/ft
• Exterior baffle product
• Standard with filter & nails

TruRidge® PRO 25 Roll Exhaust Vent



Length: 25' / 7620 mm
Width: 14-3/4" / 375 mm
Height: 5/8" / 16 mm
NFA: 12 sq. in/ft
• Low profile
• Standard with coil nails

HighPoint® ROOF VENTILATION

HighPoint® Performance Ridge Exhaust Vent




Length: 4' / 1219 mm x **Width:** 12" / 305 mm
NFA: 20 sq. in/ft
• Firm, pliable design ensures and maintains proper orientation of baffle
• Standard with filter

HighPoint® Invisaridge Exhaust Vent



Length: 4' / 1219 mm x **Width:** 12" / 305 mm
NFA: 18 sq. in/ft
• Virtually invisible from any angle
• Standard with filter

HighPoint® Intake EaveVent




Length: 4' / 1219 mm x **Width:** 12" / 305 mm
NFA: 9 sq. in/ft
• Intake ventilation for homes without soffits
• Standard with filter

HighPoint® AL 50 Slant Back Box Vent



NFA: 50 sq. in/part
• One-Piece Base/Throat, Round Throat, Louvered
• Low profile aluminum construction
• Available in Black, Weathered Wood, and Brown

HighPoint® GL 50 Slant Back Box Vent



NFA: 50 sq. in/part
• One-Piece Base/Throat, Round Throat, Louvered
• Low profile aluminum construction
• Available in Black, Weathered Wood, and Brown

HighPoint® Power Vent HT



Height: 25.63" x **Width:** 25.31" x **Diameter:** 8.56"
• Standard with Pre-Wired Humidistat and Thermostat
• Available in Black and Weathered Wood

SBS Peel & Stick Premium Underlayments

WeatherMaster® HP-Flex

High-Temp Flexible Underlayment



Length: 65' / 19812 mm **Width:** 36" / 914 mm
1.95 Square Roll Provides Approximately 195 sq. ft. of Material

CODES AND COMPLIANCES

- ASTM E108 Class A and Class C Fire Rating — Based on Roof Covering
- ASTM D1970, Standard Ice Dam Underlayment
- Florida Building Code Approved
- Miami-Dade County Product Control Approved 

WeatherMaster® Ice & Water 200

Granular Shingle Underlayment



Length: 65' / 19812 mm **Width:** 36" / 914 mm
1.95 Square Roll Provides Approximately 195 sq. ft. of Material

CODES AND COMPLIANCES

- ASTM E108 Class A and Class C Fire Rating — Based on Roof Covering
- ASTM D1970, Standard Ice Dam Underlayment
- ICC-ES Report ER 178
- Florida Building Code Approved
- Miami-Dade County Product Control Approved 

WeatherMaster® HP-Granular

Granular Shingle Underlayment



Length: 65' / 19812 mm **Width:** 36" / 914 mm
1.95 Square Roll Provides Approximately 195 sq. ft. of Material

CODES AND COMPLIANCES

- ASTM E108 Class A and Class C Fire Rating — Based on Roof Covering
- ASTM D1970, Standard Ice Dam Underlayment
- Florida Building Code Approved

WeatherMaster® Tile

Stackable High-Temp Underlayment



Length: 65' / 19812 mm **Width:** 36" / 914 mm
2 Square Roll Provides Approximately 216 sq. ft. of Material

CODES AND COMPLIANCES

- ASTM E108 Class A and Class C Fire Rating — Based on Roof Covering
- ASTM D1970, Standard Ice Dam Underlayment
- Miami-Dade County TAS 103 Test
- Miami-Dade County Product Control Approved 

Premium Synthetic Underlayments

GorillaGuard®

Premium Underlayment



Length: 250' / 76200 mm **Width:** 48" / 1219 mm
Square per Roll Coverage: 10 Coverage with 4" Lap: 917 sq. ft.

CODES AND COMPLIANCES

- ASTM 8257, Mechanically Attached
- Polymeric Roof Underlayment Used in Steep Slope Roofing
- AC 207, UV Exposure for 180 Days
- AC 207, Accelerated Aging
- ASTM E108, Class A Fire Resistance as a Prepared Roofing Accessory
- ASTM D6757, Inorganic Shingle Underlayment Standard
- Florida Building Code Approved
- Miami-Dade County Product Control Approved 

Summit®

Synthetic Underlayment



Length: 250' / 76200 mm **Width:** 48" / 1219 mm
Square per Roll Coverage: 10 Coverage with 4" Lap: 917 sq. ft.

CODES AND COMPLIANCES

- ASTM 8257, Mechanically Attached
- Polymeric Roof Underlayment Used in Steep Slope Roofing
- AC 207, UV Exposure for 180 Days
- AC 207, Accelerated Aging
- ASTM E108, Class A Fire Resistance as a Prepared Roofing Accessory
- ASTM D6757, Inorganic Shingle Underlayment Standard
- Florida Building Code Approved
- Miami-Dade County Product Control Approved 

* In order to qualify for the Atlas Lifetime Algae Resistance Limited Warranty against black streaks caused by blue-green algae, installation must include StormMaster® Hip & Ridge shingles featuring Scotchgard™, Pro-Cut® Hip & Ridge shingles featuring Scotchgard™ Protector, or Pro-Cut® High Profile Hip & Ridge shingles featuring Scotchgard™ Protector with Atlas shingles featuring Scotchgard™ Protector.

** Refer to the Atlas Roofing Limited Shingle Warranty for all coverage requirements.

*** Cool Roof Rating Council Solar Reflex Index (SRI) approved. SRI ratings are recorded as "SRI Initial" testing results. www.coolroofs.org

¹ Refer to the Atlas Signature Select® Limited Warranty for all system coverage requirements.

² Helps resist the black streaks caused by blue-green algae.

³ WeatherMaster® Tile - 180 Days, WeatherMaster® HP-Flex - 90 Days, WeatherMaster® 200 - 45 Days, WeatherMaster® HP-Granular - 45 Days.

Scotchgard™ and the Scotchgard™ Protector logo, including the plaid design and 3M™ logo, are all trademarks of 3M.



AtlasRoofing.com

#AtlasProtects