


Roofing Products Reference Guide

SHINGLES/UNDERLAYMENT/ACCESSORIES

Signature Select®
Roofing System

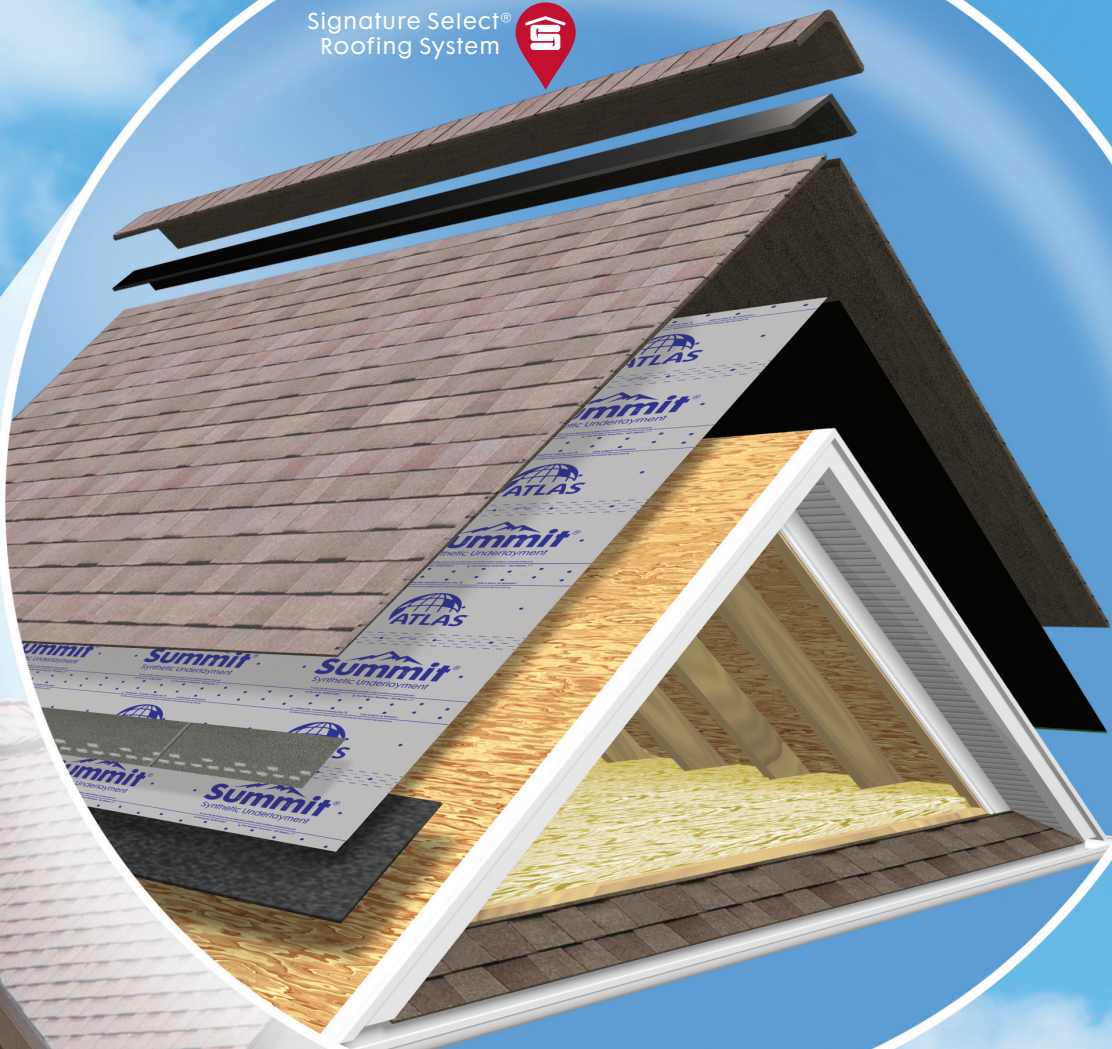


Atlas Designer Shingles

For lasting protection against black streaks caused by algae, install shingles featuring the Atlas Lifetime* Algae Resistance Limited Warranty.

StormMaster® Shake

Premium Protection with Exclusive Core4® Technology



Length: 42" / 1066.8 mm
Width: 14" / 355.6 mm
Exposure: 6" / 152.4 mm
Shingles Per Bundle: 18-20



10 COLORS

Aspen Grove
Black Shadow
Chestnut
Copper Canyon
Grand Teton
Moonlight Beach - SRI 18***
Midnight Lake
Morning Harvest
Pewter
Weathered Wood

FEATURES

3M™ Scotchgard™ Protector
3M™ Smog-Reducing Technology
3M™ Cooling Technology (Moonlight Beach)
150 mph Wind Limited Warranty**
FASTAC® Double Sealant Lines
Manufactured Using Core4®
Polymer Modified Technology
Class 4 Impact Resistance - UL 2218
Atlas Lifetime* Algae Resistance
Limited Warranty
Lifetime Limited Warranty**
Atlas Signature Select® Eligible¹

ASTM

D7158, Class H Wind Resistance,
Passed at 150 mph
D6381, Uplift Resistance
D3018, Type 1
D3161, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance

UL


2218, Class 4 Impact Resistance

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved-FL 16305
Miami-Dade County Product
Control Approved 

Pinnacle® Impact

Lasting Beauty that Weathers the Storm



Length: 42" / 1066.8 mm
Width: 14" / 355.6 mm
Exposure: 6" / 152.4 mm
Shingles Per Bundle: 18-20



6 COLORS

Black Shadow IR
Desert Shake IR
Hearthstone IR
Heather IR
Pewter IR
Weathered Wood IR

FEATURES

3M™ Scotchgard™ Protector
3M™ Smog-Reducing Technology
Class 4 Impact Resistance - UL 2218
130 mph Wind Limited Warranty**
FASTAC® Double Sealant Lines
Polymer Modified Technology
Atlas Lifetime* Algae Resistance
Limited Warranty
Lifetime Limited Warranty**
Atlas Signature Select® Eligible¹


ASTM

D7158, Class H Wind Resistance,
Passed at 150 mph
D6381, Uplift Resistance
D3018, Type 1
D3161, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance

UL


2218, Class 4 Impact Resistance

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved-FL 16305
Miami-Dade County Product
Control Approved 

Pinnacle® Sun

Cool Roof Technology that Fights Smog



Length: 42" / 1066.8 mm
Width: 14" / 355.6 mm
Exposure: 6" / 152.4 mm
Shingles Per Bundle: 18-20



6 COLORS

Cool Coastal Cliffs - SRI 16***
Cool Coral Canyon - SRI 16***
Cool Driftwood - SRI 17***
Cool Moonlight Beach - SRI 18***
Cool Sand - SRI 19***
Cool Surf - SRI 16***

FEATURES

3M™ Scotchgard™ Protector
3M™ Cooling Technology
3M™ Smog-Reducing Technology
Class 3 Impact Resistance - UL 2218
130 mph Wind Limited Warranty**
FASTAC® Double Sealant Lines
Atlas Lifetime* Algae Resistance
Limited Warranty
Lifetime Limited Warranty**
Atlas Signature Select® Eligible¹

ASTM

D7158, Class H Wind Resistance,
Passed at 150 mph
D6381, Uplift Resistance
D3018, Type 1
D3161, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance
E1980, Solar Reflectance

UL

2218, Class 3 Impact Resistance

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved-FL 16305
Miami-Dade County Product
Control Approved 




#AtlasProtects

Hip & Ridge Shingles

Pinnacle® Pristine

High Performance Meets Lasting Beauty



Length: 42" / 1066.8 mm
Width: 14" / 355.6 mm
Exposure: 6" / 152.4 mm
Shingles Per Bundle: 18-20



16 COLORS

Black Shadow
Burnt Hickory
Coastal Granite
Copper Canyon
Hearthstone
Heatherblend
Majestic Shake
Morning Harvest
Oyster Shell
Pewter
Summer Storm
Sunset
Tan Mist
Weathered Shadow
Weathered Wood
Woodland Green

FEATURES

3M™ Scotchgard™ Protector
Class 3 Impact Resistance - UL 2218
130 mph Wind Limited Warranty**
FASTAC® Double Sealant Lines
Atlas Lifetime* Algae Resistance
Limited Warranty
Lifetime Limited Warranty**
Atlas Signature Select® Eligible¹

ASTM

D7158, Class H Wind Resistance,
Passed at 150 mph
D6381, Uplift Resistance
D3018, Type 1
D3161, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance

UL


2218, Class 3 Impact Resistance

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved—FL 16305
Miami-Dade County Product
Control Approved

ProLam®

Exceptional Value in a Designer Look



Length: 42" / 1066.8 mm
Width: 14" / 355.6 mm
Exposure: 6" / 152.4 mm
Shingles Per Bundle: 18-20



7 COLORS

Black Shadow
Desert Shake
Hearthstone
Hickory
Pewter
Weathered Shadow
Weathered Wood

FEATURES

Up to 130 mph Wind
Limited Warranty**
Algae Resistant Shingle
Lifetime Limited Warranty**
3M™ Ceramic-Coated Granules
Atlas Signature Select® Eligible¹

ASTM


D7158, Class H Wind Resistance,
Passed at 150 mph
D6381, Uplift Resistance
D3018, Type 1
D3161, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved—FL 16305
Miami-Dade County Product
Control Approved

StormMaster®

Featuring Core4® Polymer Modified Technology



Dimensions: 12" x 12"
Exposure: 5 5/8"
Coverage: 31 Linear Feet
Shingles Per Package: 66



COLORS

To match StormMaster® Shake shingles

FEATURES

Core4® Polymer Modified Technology
3M™ Scotchgard™ Protector
130 mph Wind Limited Warranty**
Atlas Lifetime* Algae Resistance
Limited Warranty
Atlas Signature Select® Eligible¹
Required for use with StormMaster® Shake shingles

ASTM

D3018, Type 1
D3161, Type 1, Class F, Tested at 110 MPH
D3462, As Manufactured
E108, Class A Fire Resistance

UL

2218, Class 4 Impact Rating

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved—FL 16305
Miami-Dade County Product
Control Approved


Dreaming of a Home Redesign?



Get creative with the Atlas Roof Inspiration Center. In the Roof & Home Design Studio, you can upload photos of your home and swipe to visualize different looks. With the Visual Product Selector, explore Atlas shingle styles, features, and colors to help you visualize and choose the perfect roof for your home.

AtlasRoofing.com/Roof-Inspiration

Pro-Cut 
Hip & Ridge Shingles



Dimensions: 12" x 12"
Exposure: 5 5/8"
Coverage: 31 Linear Feet
Shingles Per Package: 66



COLORS

To match Atlas shingles

FEATURES

3M™ Scotchgard™ Protector
Class 3 Impact Resistance - UL 2218
130 mph Wind Limited Warranty**
Atlas Lifetime* Algae Resistance
Limited Warranty
Lifetime Limited Warranty**
Atlas Signature Select® Eligible¹


ASTM

D3018, Type 1
D3161, Type 1, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance


UL

2218, Class 3 Impact Resistance

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved-FL 16305
Miami-Dade County Product
Control Approved 

Pro-Cut 
High Profile
Hip & Ridge Shingles



Dimensions: 10" x 11 1/2"
Exposure: 8 1/4"
Coverage: 20 Linear Feet
Shingles Per Package: 30



COLORS

To match Atlas shingles

FEATURES

3M™ Scotchgard™ Protector
Manufactured Using SBS Asphalt
Atlas Lifetime* Algae Resistance
Limited Warranty
Lifetime Limited Warranty**
Atlas Signature Select® Eligible¹


ASTM

D3018, Type 1
D3161, Type 1, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance

CODES AND COMPLIANCES

Wind Resistance (UL 997)
CAN/CSA-A123.5-M90

ProLam
Hip & Ridge Shingles



Dimensions: 12" x 12"
Exposure: 5 5/8"
Coverage: 31 Linear Feet
Shingles Per Package: 66



COLORS

Black
Hearthstone
Weathered Wood

FEATURES

Algae Resistance Limited Warranty
130 mph Wind Limited Warranty**
Atlas Signature Select® Eligible¹

ASTM

D3018, Type 1
D3161, Type 1, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved-FL 16305
Miami-Dade County Product
Control Approved 



A Brand You
Know and Trust
Scotchgard™ Protector
25+ years of proven
performance.

* In order to qualify for the Atlas Lifetime Algae Resistance Limited Warranty against black streaks caused by blue-green algae, installation must include StormMaster® Hip & Ridge shingles featuring Scotchgard™, Pro-Cut® Hip & Ridge shingles featuring Scotchgard™ Protector, or Pro-Cut® High Profile Hip & Ridge shingles featuring Scotchgard™ Protector with Atlas shingles featuring Scotchgard™ Protector.

** Refer to the Atlas Roofing Limited Shingle Warranty for all coverage requirements.

*** Cool Roof Rating Council Solar Reflex Index (SRI) approved.

¹ Refer to the Atlas Signature Select® Limited Warranty for all system coverage requirements.

² Helps resist the black streaks caused by blue-green algae.


³ WeatherMaster® Tile - 180 Days, WeatherMaster® Pro-Grade - 90 Days WeatherMaster® 200 - 45 Days, WeatherMaster® Flexible - 30 Days.

Scotchgard™ and the Scotchgard™ Protector logo, including the plaid design and 3M™ logo, are all trademarks of 3M.

Starter Shingles

Pro-Cut® HP42®

Starter Shingles



Shingle Dimensions: 8" x 42"
 Exposure Limits: Up to 6"
 Per Bundle: 140 Linear Feet

ASTM

D3018, Type I
 D3161, Type I, Class F, Tested at 110 mph
 D3462 As Manufactured

CODES AND COMPLIANCES

Florida Building Code Approved-FL 16305
 Miami-Dade County Product
 Control Approved

Pro-Cut® 9XR

9" Universal Starter Shingle Roll



Roll Dimensions: 9" x 33' 6"
 Exposure Limits: Up to 9"
 Per Roll: 33' 4"

ASTM

D3018, Type I
 D3161, Type I, Class F, Tested at 110 mph
 D3462, As Manufactured


CODES AND COMPLIANCES

Florida Building Code Approved-FL 16305
 Miami-Dade County Product
 Control Approved

Demand Peak Coverage

When you install an Atlas Signature Select® Roofing System¹, all the components are designed for and backed by the industry's best warranty coverage.

Unlike many other roofing warranties that over promise and under deliver, Atlas packs value and assurance into an enhanced premium protection period, which includes non-prorated labor and materials, tear-off and disposal fees, coverage of the full Atlas product system, and transferability.

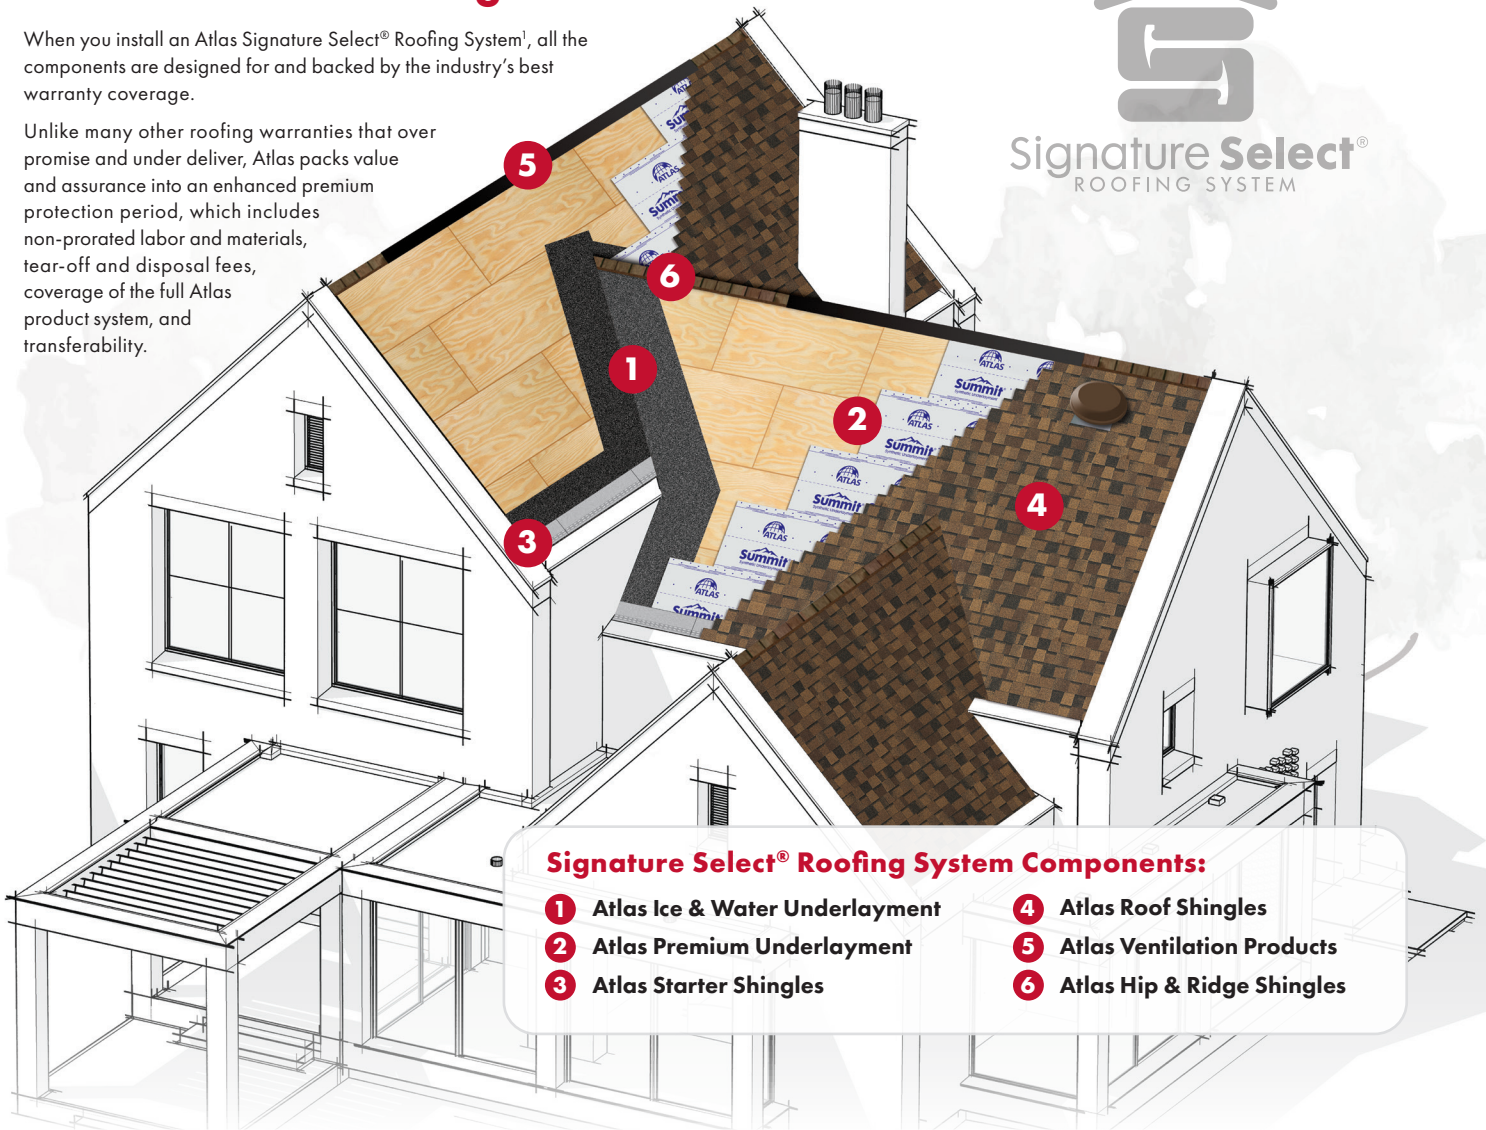

Signature Select® Roofing System Components:

- | | |
|---|-------------------------------------|
| 1 Atlas Ice & Water Underlayment | 4 Atlas Roof Shingles |
| 2 Atlas Premium Underlayment | 5 Atlas Ventilation Products |
| 3 Atlas Starter Shingles | 6 Atlas Hip & Ridge Shingles |

Roof Ventilation

TruRidge® ROOF VENTILATION

TruRidge® Standard Exhaust Vent



Length: 4' Width: 12"
Exterior baffle product
Standard with nails

TruRidge® All-Weather Exhaust Vent



Length: 4' Width: 12"
Exterior baffle product
Standard with filter & nails


TruRidge® PRO 25 Roll Exhaust Vent



25'(L) x 14-3/4"(W) x 5/8"(H)
Low Profile. Standard with coil nails

HighPoint® ROOF VENTILATION

HighPoint® Performance Ridge Exhaust Vent




Length: 4' Width: 12"
Firm, pliable design ensures and maintains proper
orientation of baffle
Standard with filter & nails

HighPoint® Invisaridge Exhaust Vent



Length: 4' Width: 12"
Virtually invisible from any angle
Standard with nails

HighPoint® Intake EaveVent




Length: 4' Width: 12"
Intake ventilation for homes without soffits
Standard with filter

HighPoint® AL 50 Slant Back Box Vent



One-Piece Base/Throat, Round Throat, Louvered
Low profile aluminum construction
Available in Black, Weathered Wood, and Brown

HighPoint® GL 50 Slant Back Box Vent



One-Piece Base/Throat, Round Throat, Louvered
Low profile galvanized steel construction
Available in Black, Weathered Wood, and Brown

HighPoint® Power Vent HT



25.63" H x 25.31" W x 8.56" D
Standard with Pre-Wired Humidistat and Thermostat
Available in Black and Weathered Wood

SBS Peel & Stick Premium Underlayments

WeatherMaster® HP-Flex

High-Temp Flexible Underlayment



Length: 65'
Width: 36"
1.95 Square Roll Provides Approximately 195 sq. ft. of Material

CODES AND COMPLIANCES

ASTM E108 Class A and Class C Fire Rating –
Based on Roof Covering
ASTM D1970, Standard Ice Dam Underlayment
Florida Building Code Approved


WeatherMaster® Ice & Water 200

Granular Shingle Underlayment



Length: 65'
Width: 36"
1.95 Square Roll Provides Approximately 195 sq. ft. of Material

CODES AND COMPLIANCES

ASTM E108 Class A Fire Rating—Based on Roof Covering
ASTM D1970, Standard Ice Dam Underlayment
ICC-ES Report ER 1783
Florida Building Code Approved
Miami-Dade County Product Control Approved 


WeatherMaster® Tile

Stackable High-Temp Underlayment



Length: 72'
Width: 36"
2 Square Roll Provides Approximately 216 sq. ft. of Material

CODES AND COMPLIANCES

ASTM E108 Class A Fire Rating - Based on Roof Covering
ASTM D1970, Standard Ice Dam Underlayment
Miami-Dade County TAS 103 Test
Miami-Dade County Product Control Approved 

Premium Synthetic Underlayments

GorillaGuard®

Premium Underlayment



Length: 250'
Width: 48"
Square Per Roll Coverage: 10
Coverage with 4" Lap: 917 sq. ft.

CODES AND COMPLIANCES

ASTM 8257, Mechanically Attached Polymeric Roof Underlayment Used in Steep Slope Roofing
AC 207, UV Exposure for 180 Days
AC 207, Accelerated Aging
ASTM E108, Class A Fire Resistance as a Prepared Roofing Accessory
ASTM D6757, Inorganic Shingle Underlayment Standard
Florida Building Code Approved
Miami-Dade County Product


Summit®

Synthetic Underlayment



Length: 250'
Width: 48"
Square Per Roll Coverage: 10
Coverage with 4" Lap: 917 sq. ft.

CODES AND COMPLIANCES

ASTM 8257, Mechanically Attached Polymeric Roof Underlayment Used in Steep Slope Roofing
AC 207, UV Exposure for 180 Days
AC 207, Accelerated Aging
ASTM E108, Class A Fire Resistance as a Prepared Roofing Accessory
ASTM D6757, Inorganic Shingle Underlayment Standard
Roofing Accessory
Florida Building Code Approved
Miami-Dade County Product Control Approved 



AtlasRoofing.com

#AtlasProtects