

# Pro-Cut<sup>®</sup> Starter Shingles

## 9" Universal Starter Roll

Pro-Cut<sup>®</sup> Universal 9XR Starter Roll shingles protect the roof edge and provide anchoring power for high wind resistance at the critical eave and rake areas. They protect the roof by filling in spaces under the cut-outs and edges for the first course of exposed shingles, preventing wind uplift.

### PRODUCT SPECIFICATIONS

Product	Exposure	Shingle Dimensions	Per Package
<b>Pro-Cut<sup>®</sup> Universal 9XR Starter Roll</b>	Up To 9"	9" x 33' 6" Roll	33' 4" Roll



For maximum protection and warranty coverage, install an Atlas Signature Select<sup>®</sup> Roofing System with components designed and backed by an Atlas warranty.

### FEATURES AND BENEFITS

- 9" universal size for all asphalt shingle types
- Saves time and labor - no need to cut shingle tabs
- High-performance dual seal-down strips prevent wind uplift
- Easy self-adhering peel & stick application
- Increases ice dam protection
- Can be used as flashing tape
- IBHS Fortified Roof System Eligible
- Atlas Signature Select Roofing System Eligible<sup>1</sup>
- Required with Wind Limited Warranty<sup>\*\*</sup>

### ASTM

D3018, Type 1  
 D3161, Class F, Tested at 110 mph  
 D3462, As Manufactured  
 D1970

### CODES AND COMPLIANCES

Florida Building Code Approved – FL 38571  
 Miami-Dade County Product Control Approved

### SAFETY, STORAGE AND HANDLING

**WARNING:** Roofing application can be dangerous. Observe all precautions and safety guidelines in accordance with proper roofing trade practices. Minimize roof traffic. Perform regular roof maintenance in appropriate weather.


**IMPORTANT PRECAUTIONS:** Pallets of Pro-Cut<sup>®</sup> Universal 9XR Starter Roll should not be double stacked. Provide cover on top and sides, allowing for adequate ventilation and store at room temperature until use. Protect from weather during storage and on job site.

For additional safety, storage and handling instructions go to: [AtlasRoofing.com/roof-shingles/sds](https://AtlasRoofing.com/roof-shingles/sds)

### INSTALLATION AND SPECIFICATIONS

For warranty installation instructions go to: [AtlasRoofing.com/roof-shingles/pro-cut-starter-shingles](https://AtlasRoofing.com/roof-shingles/pro-cut-starter-shingles)

### APPLICATION OF PRO-CUT<sup>®</sup> UNIVERSAL STARTER SHINGLES

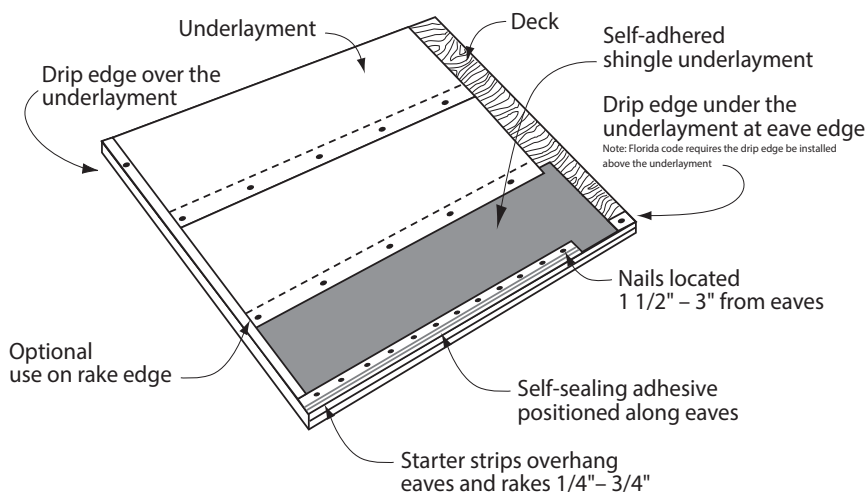

Atlas Roofing Corporation (ATLAS) warrants to you, the original owner of its shingle products, that this product is free from any manufacturing defects that materially affect the performance of your shingle during the Premium Protection Period or that cause leaks for the balance of the applicable warranty period.

<sup>\*\*</sup> Refer to the Atlas Roofing Limited Shingle Warranty for all coverage requirements.

<sup>1</sup> Refer to the Atlas Signature Select<sup>®</sup> Limited Warranty for all system coverage requirements.



[AtlasRoofing.com](https://AtlasRoofing.com) #AtlasProtects

© Copyright 2024, Atlas Roofing Corporation ATL-236379-01 8/24